

# CS3740ST-C

# Conductivity

## Electrode



### Specifications:

Electrical conductivity range: 0~500000  $\mu\text{S}/\text{cm}$

TDS range: 0~250,000 mg/L

Salinity range: 0~700000 ppm

Electrode mode: 4-pole

Electrode constant:  $K \approx 0.5$

Material measurement: Hastelloy alloy

Shell material: PPS


temperature : 0-120°C

Pressure resistance: 0-0.6 MPa

Temperature sensing: NTC30K

Connection interface: NPT3/4

Wiring: Standard split cable, 10m

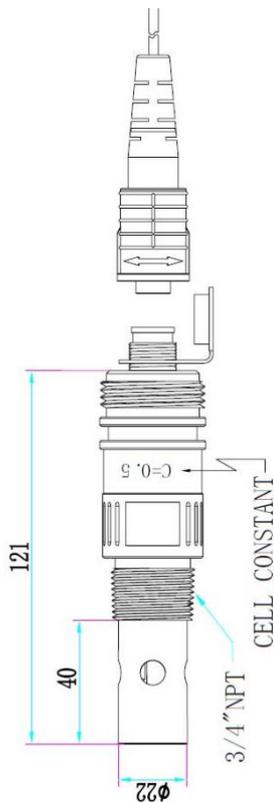

### number of order

name	content	number
temperature sensor	PT1000	P2
Cable length	10m	m10
	20m	m20
Cable connector	one-word insertion	A3