


CS4773 dissolved oxygen electrode

— polarography

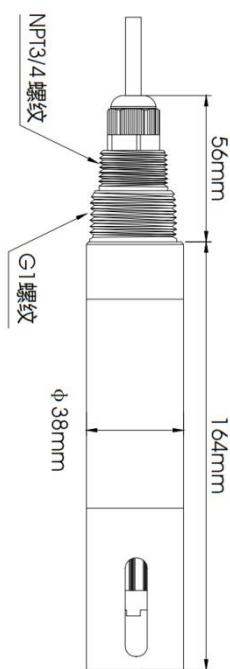

Specifications:

Shell material: SUS316L + POM

Water resistance rating: IP68

Measurement range: 0-40 mg/L

Measurement accuracy: $\pm 1\%$ F.S

Pressure range: $\leq 0.3\text{Mpa}$

Temperature compensation:

NTC10K/NTC2.252K

PT100/PT1000

Temperature range: 0-50°C

Calibration: Anoxic water calibration, air calibration

Connection method: 4-core cable

Cable length: 10 meters standard

Thread type: NPT3/4, G1 thread

Scope of application: General use, including river water, lakes, drinking water, and environmental protection.