

CS4800 type dissolved oxygen electrode

— polarography



Specifications:

Shell material: SUS316L

Water resistance rating: IP65

Measurement range: 0-200 $\mu\text{g/L}$ to 20 mg/L

Measurement accuracy: $\pm 1\%$ F.S

Pressure range: ≤ 0.3 Mpa

Temperature compensation:
NTC10K/NTC2.252K

PT100/PT1000


Temperature range: 0-80°C

Calibration: Anoxic water calibration, air calibration

Connection method: 4-core integrated cable

Cable length: Standard 5-meter cable, customizable

Thread type: Clamping, with dedicated

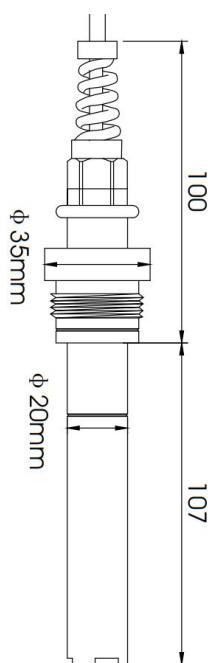

flow cup

Scope of application: Power plant boiler

water, etc.