



SC300LDO Portable DO Meter

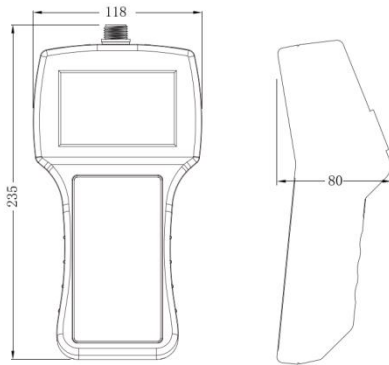

Technical Specifications:

- 1、Range: 0-20mg/L, 0-200%
- 2、Accuracy: $\pm 1\%$ F.S
- 3、Resolution: 0.01mg/L, 0.1%
- 4、Calibration: Sample Calibration
- 5、Material: Sensor: SUS316L+POM; Display: ABS+PC
- 6、Storage Temperature: $-15\sim 40^{\circ}\text{C}$
- 7、Working Temperature: $0\sim 50^{\circ}\text{C}$
- 8、Sensor Dimension: 22mm* 221mm; Weight: 0.35KG
- 9、Display: 235*118*80mm; Weight: 0.55KG
- 10、Sensor IP Grade: IP68; Display: IP66
- 11、Cable length: 5 m cable or customize
- 12、Display: 3.5 Inch color screen, Adjustable backlight
- 13、Data Storage: 16MB, around 360,000 groups of data
- 14、Power Supply: 10000mAh built-in lithium battery
- 15、Charging and Data Export: Type-C